

Digihbeat **TITANIUM**




WATERCO
Water, the liquid of life

Digiheat TITANIUM

Introducing the new Digiheat Titanium range of inline electric water heaters.

Digiheat Titanium inline electric heaters are versatile and easy to use. Easily program your desired water temperature and let Digiheat do the rest.

Digiheat Titanium are ideal for heating spas, swim spas, plunge pools and aquaculture and agriculture applications.



NN
TITANIUM

WATERCO
Water, the liquid of life

Digiheat TITANIUM

- Digital temperature management & self-diagnosis
- New coiled Titanium heating element maximizing heat transfer
- Streamline weather proof housing
- Simple four button programming
- Quick connect unions for ease of installation and maintenance
- Available in sizes 2.4, 3.6, 4.8, 6.0, 18 & 24 kW



SMART CONTROLS for temperature management and self diagnosis



INBUILT SAFETY DEVICES for water flow and over temperature cutout



POWERFUL HEAT TRANSFER through the coiled element, maximising water contact



Titanium coiled heating element is impervious to ozone, iodine, baquacil, salt and chlorinated water



WEATHERPROOF CABINET for outdoor installation



Warranty - Residential - 2 years
Warranty - Commercial - 1 year
Conditions apply, see the Waterco Limited warranty set out in the Waterco Warranty Booklet or view it at www.waterco.com



WATERCO
Water, the liquid of life

Digiheat **TITANIUM**

Digiheat Titanium heaters are fitted with titanium elements and are impervious to:

- ozone
- bromine
- iodine
- baquacil
- sea water
- salt and chlorinated spa water



Digihheat TITANIUM

Single phase model



2.4, 3.6, 4.8, 6.0 kW


Three phase model




18 & 24kW

Digihheat TITANIUM

Single phase model

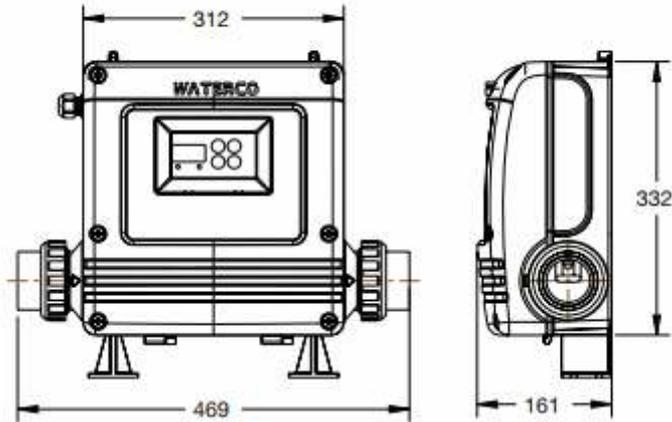

Three phase model

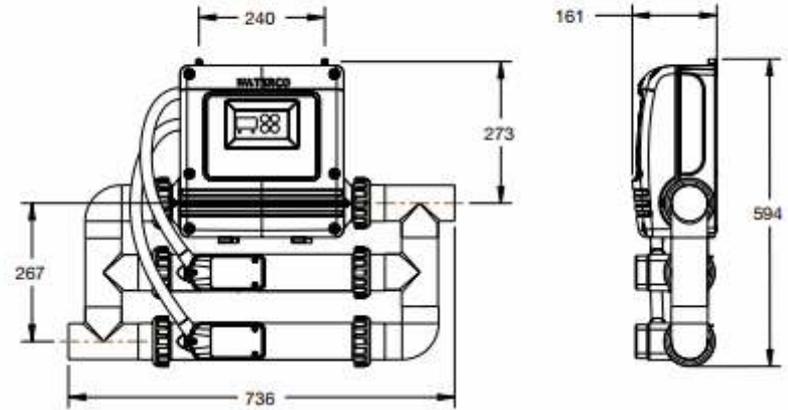

Digiheat **TITANIUM**

Specifications

Model	Dry Weight (kg)	Supply Voltage (volts)	Frequency (Hz)	Amps	Minimum Circuit Size (Amps)	IP Rating	Max Pressure (kPa) @ 31m head
2.4kW	3.5	240	50	10	15	IP23	300
6.3 kW	3.5	240	50	20	20	IP23	300
4.8 kW	3.5	240	50	25	25	IP23	300
6.0 kW	3.5	240	50	30	30	IP23	300
18.0 kW	9.5	415	50	25 / phase	30	IP23	300
24.0 kW	9.5	415	50	35 / phase	40	IP23	300

Complies with EN60335.260 and AS3136/NZS56232



Digiheat **TITANIUM**

Flow Rates

Model	Recommended Minimum Flow Rate (litres / minute)	Recommended Maximum Flow Rate (litres / minute)
2.4kW	150	350
6.3 kW	150	350
4.8 kW	150	350
6.0 kW	150	350
18.0 kW	250	450
24.0 kW	250	450



Digiheat **TITANIUM**

Installation

Digiheat Titanium single phase models can be mounted directly onto the pipework, fixed to a wall or base mounted. Wall and base fittings are supplied. Single phase units should be plumbed using minimum 40mm pipe.

Digiheat Titanium three phase units should be mounted securely and directly to a wall due to the wet weight. Wall fittings are supplied with the unit. The use of double sided pipe saddles to support the unit and pipework is recommended. Three phase units should be plumbed using minimum 50mm pipe.

